



MAKE THE CHORE OF
FEEDING PLEASANT !



valmetal.com

MAKE
LIFE BETTER



**VALMETAL IS THE ONLY COMPANY
OFFERING SUCH A WIDE RANGE
OF MOTORIZED FEED CARTS**

A motorized feedcart specially designed to facilitate the chore of feeding !

All components are engineered for outstanding performances, extended life and low maintenance.



STANDARD FEATURES

- 6 ply tires
- Heavy duty #662 pintle apron and conveyor chains
- High performance hydrostatic pump
- Direct driven by two (2) hydraulic motors
- Translucent oil reservoir and replaceable oil filter for extended life
- Parking brake
- Easy access fueling cap
- Anti-vibration motor base
- Engine guard
- Efficient steering system
- High quality mechanical components

SIMPLICITY

- Machine components are easily accessible
- Access doors are hinge-mounted
- Floor is bolted for easy replacement
- Oil filter protects the hydraulic components

INSIDE VIEW OF MOTORIZED CARTS



STANDARD BEATERS



TMR BEATERS
FOR LONGER STEMS OF HAY

ERGONOMY

The easy to use levers and pedals, designed with advanced ergonomics, contribute to the operator's comfort and performance of the cart !

OPTIONS

- Flat free tires
- Seat
- TMR beaters
- Removable trough

**OPTIONAL 12 VDC ELECTRIC
STARTER AND BATTERY**



POWER

All Valmetal gas powered feed carts are equipped with powerful, durable and efficient Honda engines that are application proven for performance and reliability.



WITH (RIGHT) UNLOADING AUGER

The VA model is equipped with a twelve (12) inch sturdy discharge auger (right hand discharge only) for a fast and uniform unloading of the ration. The U trough is lined with an abrasion resistant polymer liner (UHMW).

A seat is also available for greater comfort (option).

The VA model is available in different sizes:

- 525 (32 cu.ft./0.9 m³)
- 530 (38.5 cu.ft./1 m³)
- 542 (54 cu.ft./1.5 m³)
- 960 (77 cu.ft./2.1 m³)
- 975 (96 cu.ft./2.7 m³)





SUPERCART_{CC}

LEFT/RIGHT DISCHARGE BY CONVEYOR



The CC model features a cross conveyor driven by a sturdy reversible gearbox that allows unloading on either side of the cart for more flexibility. Foot operated, all the components are underneath the cart to eliminate damage from curbs and doorways.

The CC model is available in different sizes:

- 525 (32 cu.ft./0.9 m³)
- 530 (38.5 cu.ft./1 m³)
- 542 (54 cu.ft./1.5 m³)
- 960 (77 cu.ft./2.1 m³)
- 975 (96 cu.ft./2.7 m³)





HIGH DISCHARGE



Specially designed for elevated mangers, the HT model features an inclined bottom section and twin discharge augers to evenly discharge the ration (right side only). A 16" long slide is supplied with the cart to carry the feed further away if needed. The bottom of the discharge opening is 40" from the floor.

The HT model is available in different sizes.

- 530 (38.5 cu.ft./1 m³)
- 542 (54 cu.ft./1.5 m³)
- 960 (77 cu.ft./2.1 m³)





WHEELS & TIRES

Different models of anti-flat tires are available (Valmetal features exclusive six-ply tires as standard equipment)

Drive traction wheels can be equipped with either all terrain, anti-flat or tractor tread tires.


ALSO AVAILABLE:



SUPERCART
AF

FRONT UNLOAD MODEL FOR
VERY NARROW AISLES



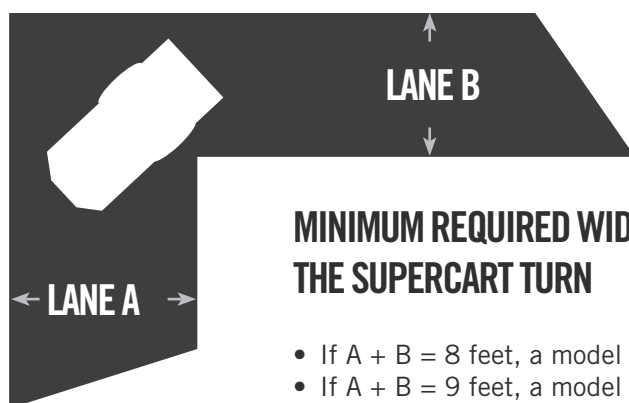

MINIMUM REQUIRED WIDTH OF AISLES TO ALLOW THE SUPERCART TURN

- If $A + B = 8$ feet, a model 525 will turn comfortably
- If $A + B = 9$ feet, a model 530 will turn comfortably
- If $A + B = 10$ feet, a model 542 will turn comfortably
- If $A + B = 12$ feet, a model 960 will turn comfortably
- If $A + B = 13$ feet, a model 975 will turn comfortably

525		530		542		960		975	
A	B	A	B	A	B	A	B	A	B
38" (97 cm)	56" (142 cm)	44" (112 cm)	62" (158 cm)	48" (122 cm)	66" (168 cm)	58" (147 cm)	76" (193 cm)	58" (147 cm)	100" (254 cm)
42" (107 cm)	52" (132 cm)	48" (122 cm)	58" (147 cm)	52" (132 cm)	62" (158 cm)	64" (163 cm)	72" (183 cm)	62" (158 cm)	96" (244 cm)
46" (117 cm)	48" (122 cm)	52" (132 cm)	54" (137 cm)	56" (142 cm)	58" (147 cm)	70" (178 cm)	70" (178 cm)	66" (168 cm)	90" (229 cm)

Model	Overall length	Overall width	Overall height	Interior box dimension (Length x Width x Height)	HP	Machine Weight
525	76" (193 cm)	30" (76 cm)	60" (150 cm)	56" (142 cm) x 27" (69 cm) x 40" (102 cm)	5.5	890 lbs (404 kg)
530	82" (208 cm)	33" (84 cm)	60" (150 cm)	62" (157 cm) x 30" (76 cm) x 40" (102 cm)	5.5	980 lbs (445 kg)
542	88" (224 cm)	37" (94 cm)	64" (160 cm)	68" (173 cm) x 34" (86 cm) x 44" (112 cm)	5.5	1080 lbs (490 kg)
960	100" (254 cm)	45" (114 cm)	64" (160 cm)	80" (203 cm) x 42" (107 cm) x 44" (112 cm)	9	1440 lbs (653 kg)
975	116" (295 cm)	45" (114 cm)	64" (160 cm)	96" (244 cm) x 42" (107 cm) x 44" (112 cm)	9	1645 lbs (748 kg)

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

YOUR LOCAL DEALER:



230, Boulevard industriel
Saint-Germain-de-Grantham
(Québec) J0C 1K0 Canada
Tél. : 819 395-4282
Téléc. : 819 395-2030



15497 State Hwy 131
Tomah, WI 54660
États-Unis
Tél. : (608) 374-2206
Téléc. : (608) 374-2302

info@valmetal.com - valmetal.com